




**ENGINEERED FLEXIBLE PRODUCTS, INC.**

## STRAIGHT CONNECTORS

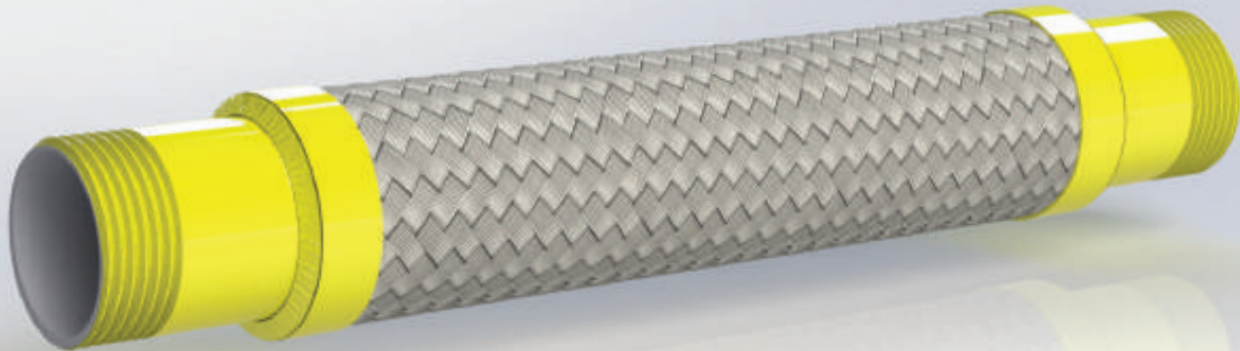

EFP CSA rated flex connectors are designed for use as a connector in medium pressure natural gas applications in the United States and Canada. They are built to length and come with either carbon steel or stainless steel Sch40 male NPT ends or beveled weld ends.


Every assembly is pressure tested and is rated to 150 psig.

Safety factors range from 6:1 on the 4" diameter assemblies to greater than 28:1 on ½" diameter. All finished assemblies come with a metal tag permanently attached with manufacturer, manufacture date, maximum working pressure, maximum lateral offset, and CSA logo.



**EFP**  
ENGINEERED FLEXIBLE PRODUCTS, INC.

1-877-769-8262

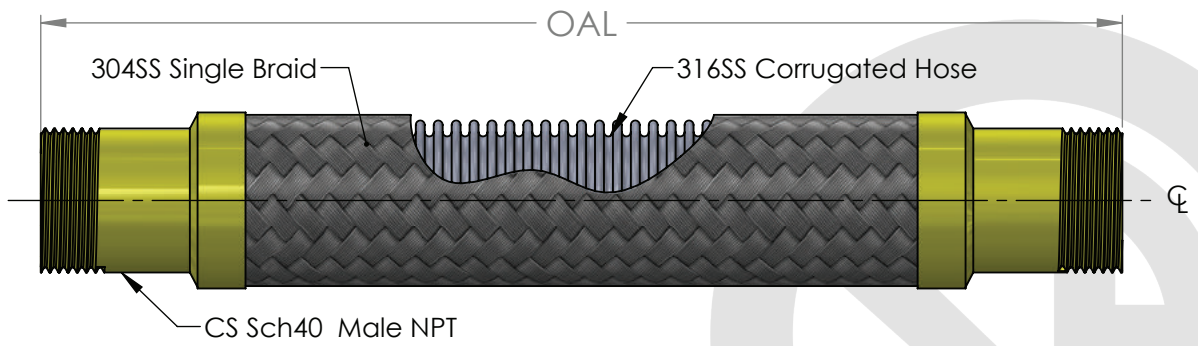


QTY	Pipe Size NPT	OAL	Part Number	Burst Pressure @ 70°F (PSIG)	Min. Bend Radius Static	Min. Bend Radius Dynamic	Working Pressure (PSIG)
	1/2"		CSA-SB26A0050-XXXX	4301	1-1/2"	6"	150 @ 70° F
	3/4"		CSA-SB26A0075-XXXX	3168	2-1/4"	8"	150 @ 70° F
	1"		CSA-SB26A0100-XXXX	2285	2-3/4"	9"	150 @ 70° F
	1-1/4"		CSA-SB26A0125-XXXX	2125	3-1/2"	10-1/2"	150 @ 70° F
	1-1/2"		CSA-SB26A0150-XXXX	1887	4"	12"	150 @ 70° F
	2"		CSA-SB26A0200-XXXX	2064	5"	15"	150 @ 70° F
	2-1/2"		CSA-SB26A0250-XXXX	1548	8"	20"	150 @ 70° F
	3"		CSA-SB26A0300-XXXX	1264	9"	22"	150 @ 70° F
	4"		CSA-SB26A0400-XXXX	927	13"	27"	150 @ 70° F

### Certification Report # 70085055

ASSEMBLIES MEET THE REQUIREMENTS SET FORTH BY ANSI/UL 536 STANDARD FOR FLEXIBLE METAL HOSES

- To designate the overall length, change the XXXX in part number to overall length in inches required.  
For example: CSA-SB26A0200-0240 would indicate a 24.0" long assembly
- To designate assemblies to be built with 304SS fittings, in part number change the 'A' to a 'B'.  
For example: CSA-SB26B0200-0240 would indicate a 304SS Sch40 Male NPT assembly

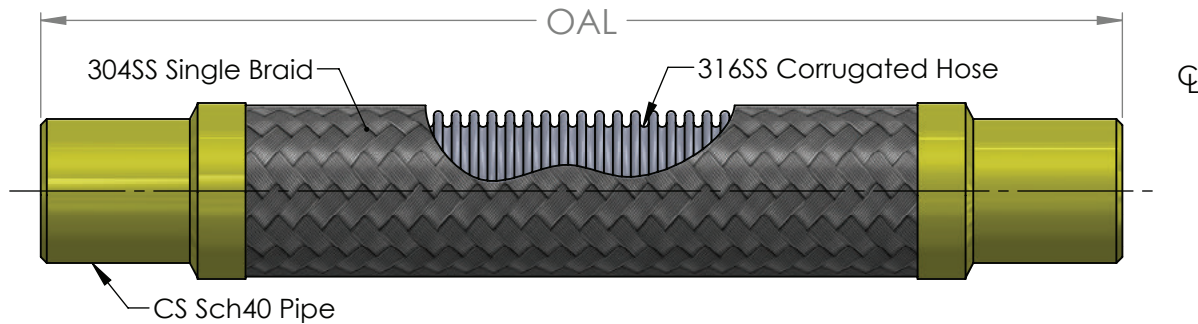

QTY	Pipe Size NPT	OAL	Part Number	Burst Pressure @ 70°F (PSIG)	Min. Bend Radius Static	Min. Bend Radius Dynamic	Working Pressure (PSIG)
	1/2"		CSA-SB30A0050-XXXX	4301	1-1/2"	6"	150 @ 70° F
	3/4"		CSA-SB30A0075-XXXX	3168	2-1/4"	8"	150 @ 70° F
	1"		CSA-SB30A0100-XXXX	2285	2-3/4"	9"	150 @ 70° F
	1-1/4"		CSA-SB30A0125-XXXX	2125	3-1/2"	10-1/2"	150 @ 70° F
	1-1/2"		CSA-SB30A0150-XXXX	1887	4"	12"	150 @ 70° F
	2"		CSA-SB30A0200-XXXX	2064	5"	15"	150 @ 70° F
	2-1/2"		CSA-SB30A0250-XXXX	1548	8"	20"	150 @ 70° F
	3"		CSA-SB30A0300-XXXX	1264	9"	22"	150 @ 70° F
	4"		CSA-SB30A0400-XXXX	927	13"	27"	150 @ 70° F



5331 Quam Ave NE  
St. Michael, MN 55376

[www.engineeredflex.com](http://www.engineeredflex.com)  
1-877-769-8262  
[sales@engineeredflex.com](mailto:sales@engineeredflex.com)

