

\*TOTAL FORCE NECESSARY TO ACCOMODATE FULL MOTION, CALCULATED @ 150 PSIG

QTY.	PIPE SIZE NPS	OAL (IN)	LL (IN)	H (IN)	APPROX. SPRING FORCE* (LBS)	WORKING PRESSURE (PSIG)	MAX. TEST PRESSURE (PSIG)	ALLOWABLE MOTIONS X, Y, OR Z
	2"	38"	14"	14-1/2"	82	516	774	2"
	2-1/2"	41-1/8"	14-1/2"	16"	86	387	580	
	3"	45-7/8"	16-1/2"	18"	93	316	474	
	4"	51-7/8"	18"	20-1/4"	127	232	348	
	5"	58-7/8"	20"	23-1/2"	214	191	286	
	6"	65-1/4"	21-1/2"	26"	228	165	247	
	8"	79"	24"	30-1/2"	312	234	351	
	10"	90"	27"	36"	345	230	345	
	12"	100-3/4"	28-1/2"	40"	399	161	245	

\*FOR SAFE WORKING PRESSURE ABOVE 70°F, MULTIPLY PRESSURE SHOWN AT 70°F TIMES CORRECTION FACTOR OF REQUIRED TEMP.

TEMP °F	FACTOR
70	1.0
200	.91
300	.85
400	.78
500	.77
600	.74


**NOTES:**

**NSF 372 - LEAD FREE:** The wetted surface of this product contacted by water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards where applicable, requiring reduced lead content.

1. MAXIMUM OPERATING TEMPERATURE: 800°F
2. OTHER STYLE FLANGES AVAILABLE



REV.	DRAWN BY: AM	Date: 1/29/2019
		5331 Quam Ave NE St. Michael, MN 55376 Phone: 763-201-2151 Fax: 763-201-2134 Email: sales@engineeredflex.com
Customer:		
Project:		
Style: SEISMIC V-LOOP 2" MOVEMENT		
SCALE: NONE	DRAWING NUMBER:	

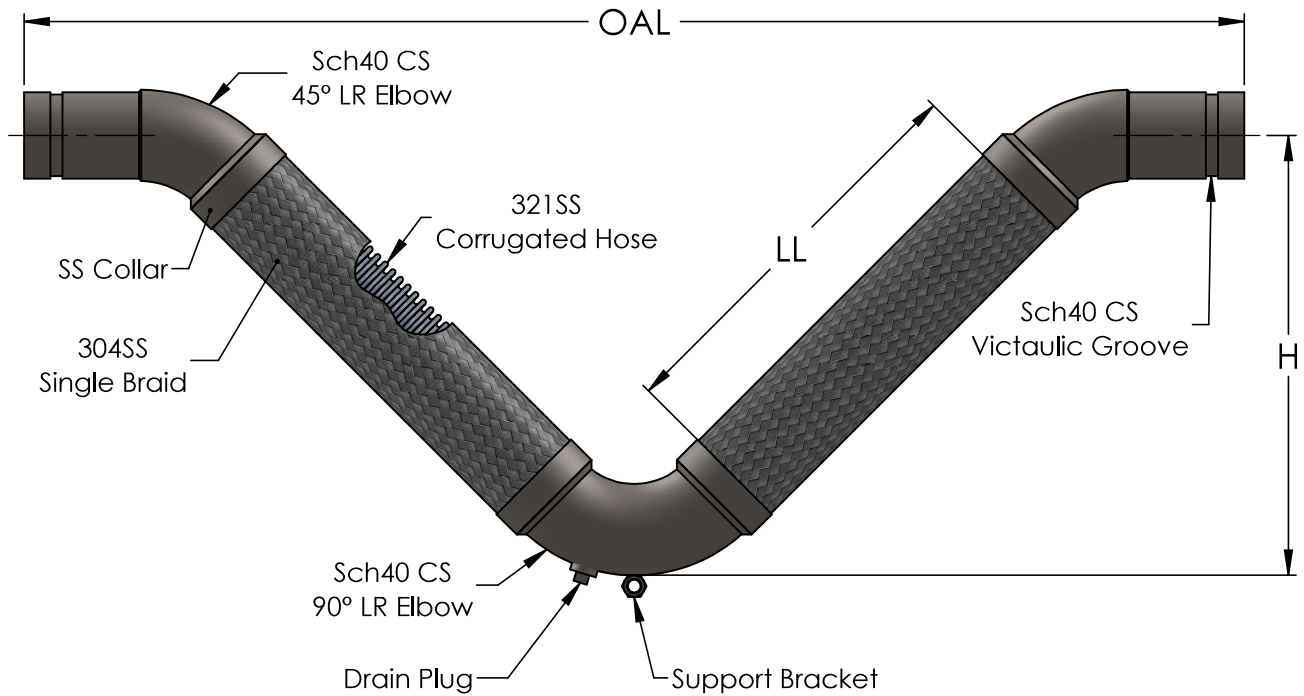

**\*TOTAL FORCE NECESSARY TO ACCOMODATE FULL MOTION, CALCULATED @ 150 PSIG**

QTY.	PIPE SIZE NPS	OAL (IN)	LL (IN)	H (IN)	APPROX. SPRING FORCE* (LBS)	WORKING PRESSURE (PSIG)	MAX. TEST PRESSURE (PSIG)	ALLOWABLE MOTIONS X, Y, OR Z
	2"	42-3/8"	17"	17"	82	516	774	3"
	2-1/2"	46"	18"	18-1/2"	86	387	580	
	3"	50-3/4"	20"	20-1/2"	93	316	474	
	4"	57-1/2"	22"	23-1/2"	127	232	348	
	5"	65-1/4"	24-1/2"	26-1/2"	214	191	286	
	6"	72-3/8"	26-1/2"	29-1/2"	228	165	247	
	8"	85-1/8"	29-1/2"	34-1/2"	312	234	351	
	10"	99-1/4"	33-1/2"	40-1/2"	345	230	345	
	12"	110-5/8"	35-1/2"	45"	399	161	245	

\*FOR SAFE WORKING PRESSURE ABOVE 70°F, MULTIPLY PRESSURE SHOWN AT 70°F TIMES CORRECTION FACTOR OF REQUIRED TEMP.

TEMP °F	FACTOR
70	1.0
200	.91
300	.85
400	.78
500	.77
600	.74


**NOTES:**

**NSF 372 - LEAD FREE:** The wetted surface of this product contacted by water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards where applicable, requiring reduced lead content.

1. **MAXIMUM OPERATING TEMPERATURE: 800°F**
2. **OTHER STYLE FLANGES AVAILABLE**



REV.	DRAWN BY: AM	Date: 1/29/2019
		5331 Quam Ave NE St. Michael, MN 55376 Phone: 763-201-2151 Fax: 763-201-2134 Email: sales@engineeredflex.com
Customer:		
Project:		
Style: SEISMIC V-LOOP 3" MOVEMENT		
SCALE: NONE	DRAWING NUMBER:	

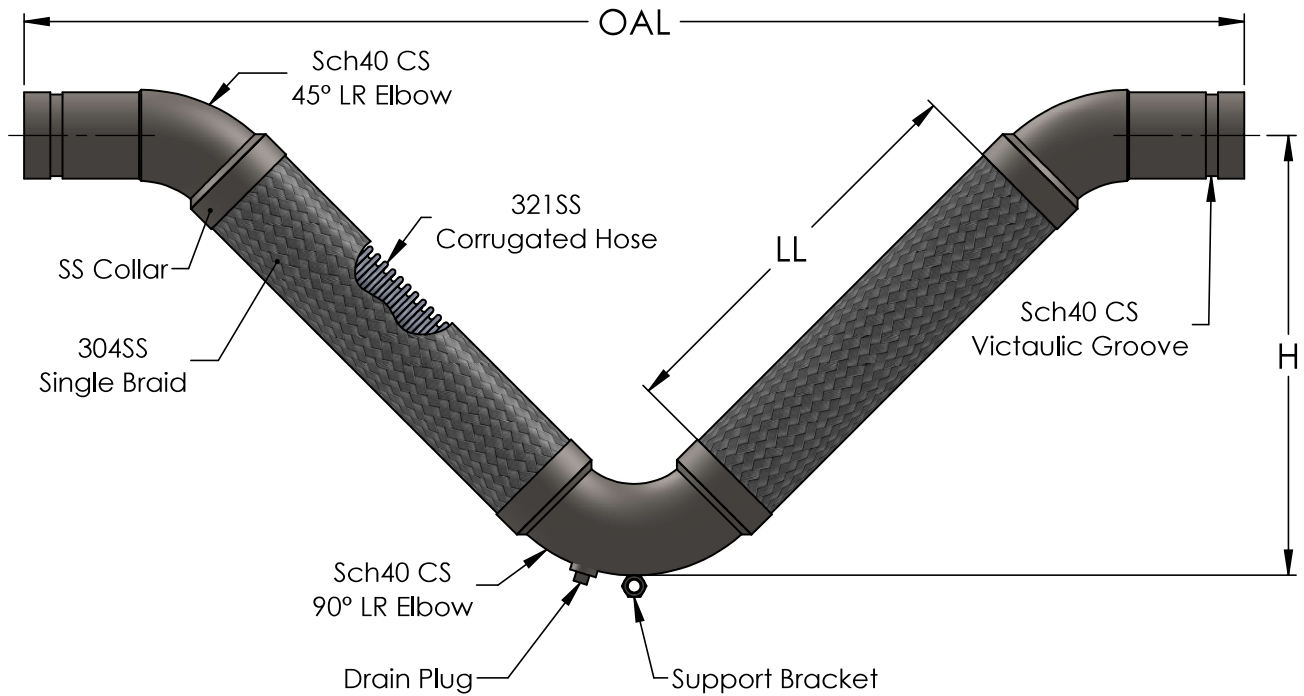

**\*TOTAL FORCE NECESSARY TO ACCOMODATE FULL MOTION, CALCULATED @ 150 PSIG**

QTY.	PIPE SIZE NPS	OAL (IN)	LL (IN)	H (IN)	APPROX. SPRING FORCE* (LBS)	WORKING PRESSURE (PSIG)	MAX. TEST PRESSURE (PSIG)	ALLOWABLE MOTIONS X, Y, OR Z
	2"	46-1/2"	20"	19"	82	516	774	4"
	2-1/2"	49-5/8"	20-1/2"	20"	86	387	580	
	3"	55-3/4"	23-1/2"	23"	93	316	474	
	4"	62-3/8"	25-1/2"	26"	127	232	348	
	5"	70-7/8"	28-1/2"	29-1/2"	214	191	286	
	6"	78"	30-1/2"	32-1/2"	228	165	247	
	8"	91-1/2"	34"	38"	312	234	351	
	10"	106-3/8"	38-1/2"	44"	345	230	345	
	12"	118-3/8"	41"	49"	399	161	241	

\*FOR SAFE WORKING PRESSURE ABOVE 70°F, MULTIPLY PRESSURE SHOWN AT 70°F TIMES CORRECTION FACTOR OF REQUIRED TEMP.

TEMP °F	FACTOR
70	1.0
200	.91
300	.85
400	.78
500	.77
600	.74

**NOTES:**

**NSF 372 - LEAD FREE:** The wetted surface of this product contacted by water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards where applicable, requiring reduced lead content.

1. **MAXIMUM OPERATING TEMPERATURE: 800°F**
2. **OTHER STYLE FLANGES AVAILABLE**



REV.	DRAWN BY: AM	Date: 1/29/2019
		5331 Quam Ave NE St. Michael, MN 55376 Phone: 763-201-2151 Fax: 763-201-2134 Email: sales@engineeredflex.com
Customer:		
Project:		
Style: SEISMIC V-LOOP 4" MOVEMENT		
SCALE: NONE	DRAWING NUMBER:	