
Guide Hardware:

Material: Carbon Steel Finish: One Coat of Paint

For Copper Tube Clamps Use Dieletric Spacer



Spider Spacers Center Pipe In Housing And Are Sized To Allow Insulation To Be Packed Around Pipe

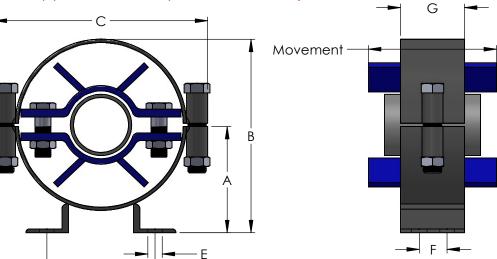

Split Housing For Easy Installation

Provides Lateral Stability To The Pipe To Prevent "Bowing". Guides Are Not Designed To Support The Weight Of The Pipe.

| Size | Ins | Model | Α | В | С | D | E | F | G | Movement | Weight |
|--------|--------|--------------|---------|--------------|---------|---------|--------|--------|----|----------|---------|
| 1/2" | 1-1/2" | PG 004-104-4 | 3-1/2" | 5-7/8" | 6-1/8" | 4-1/8" | 5/8" | 1-3/4" | 3" | 4" | 7 lbs |
| 3/4" | 1-1/2" | PG 006-605-4 | 4'' | 6-3/4" | 7-1/8" | 4-3/4" | 5/8" | 1-3/4" | 3" | 4'' | 8 lbs |
| 1'' | 1-1/2" | PG 010-605-4 | 4'' | 6-3/4" | 7-1/8" | 4-3/4" | 5/8" | 1-3/4" | 3" | 4'' | 8 lbs |
| 1-1/4" | 1-1/2" | PG 012-605-4 | 4" | 6-3/4" | 7-1/8" | 4-3/4" | 5/8" | 1-3/4" | 3" | 4'' | 8 lbs |
| 1-1/2" | 1-1/2" | PG 014-105-4 | 4" | 6-3/4" | 7-1/8" | 4-3/4" | 5/8" | 1-3/4" | 3" | 4'' | 8 lbs |
| 2" | 1-1/2" | PG 020-606-4 | 4-3/8" | 7-5/8" | 8-1/8" | 5-3/8" | 5/8" | 1-3/4" | 3" | 4'' | 9 lbs |
| 2-1/2" | 1-1/2" | PG 024-106-4 | 4-3/8" | 7-5/8" | 8-1/8" | 5-3/8" | 5/8" | 1-3/4" | 3" | 4'' | 9 lbs |
| 3" | 1-1/2" | PG 030-208-4 | 5-1/4" | 9-1/4" | 10-1/8" | 6-3/8" | 5/8" | 1-3/4" | 3" | 4'' | 11 lbs |
| 4'' | 1-1/2" | PG 040-108-4 | 5-1/4" | 9-1/4" | 10-1/8" | 6-3/8" | 5/8" | 1-3/4" | 3" | 4'' | 11 lbs |
| 5" | 1-1/2" | PG 050-110-4 | 6-1/4" | 11-5/8" | 12-1/8" | 7-1/8" | 5/8" | 2-3/4" | 4" | 4'' | 17 lbs |
| 6" | 1-1/2" | PG 060-110-4 | 6-1/4" | 11-5/8" | 12-1/8" | 7-1/8" | 5/8" | 2-3/4" | 4" | 4'' | 17 lbs |
| 8" | 1-1/2" | PG 080-112-4 | 7'' | 13-3/8" | 14-1/8" | 8-3/8" | 5/8" | 2-3/4" | 4" | 4'' | 20 lbs |
| 10'' | 1-1/2" | PG 100-216-6 | 8-7/8" | 1 <i>7</i> " | 18-1/8" | 10-7/8" | 3/4" | 4'' | 6" | 6" | 48 lbs |
| 12" | 1-1/2" | PG 120-218-6 | 9-3/4" | 18-3/4" | 20-1/8" | 11-7/8" | 3/4" | 4'' | 6" | 6" | 54 lbs |
| 14" | 1-1/2" | PG 140-220-6 | 10-7/8" | 21" | 22-1/8" | 11-3/4" | 3/4" | 4'' | 6" | 6" | 61 lbs |
| 16" | 1-1/2" | PG 160-222-8 | 12-1/8" | 23-1/8" | 24-1/8" | 14-1/2" | 7/8" | 6" | 8" | 8" | 89 lbs |
| 18" | 1-1/2" | PG 180-224-8 | 13" | 25" | 26-1/8" | 15-1/2" | 7/8" | 6" | 8" | 8" | 102 lbs |
| 20" | 1-1/2" | PG 200-226-8 | 14-3/4" | 27-3/4" | 28-1/8" | 17-1/8" | 1-1/8" | 6" | 8" | 8" | 110 lbs |

*Extended Spider Guides Are Available, **Contact Engineered Flexible Products For** Options.

| PROJECT: | | |
|----------|--|--|

REV. DRAWN BY: CL

ENGINEERED FLEXIBLE PRODUCTS, INC. Connections when Motion Matters

Date: 1/18/2021

5331 Quam Ave NE St. Michael, MN 55376 Phone: 763-201-2151 Fax: 763-201-2134 Email: sales@engineeredflex.com

Style:

SPIDER PIPE GUIDES FOR 1-1/2" INSULATION

SCALE: NONE

DRAWING NUMBER: